

		1000MΩ(1000VDC)
		3000VAC 1min
		3000VAC 1min
()		≤30ms
()		≤10ms
		196m/s ²
		490m/s ²
		10Hz ~ 500Hz 49m/s ²
		5% ~ 85%RH
		-40°C ~ 85°C
		M6
		500g
		95.0mm×45.0mm×85.1mm 89.0mm×45.0mm×85.1mm

12	9	3.6	34(0.2s)	
			4	
24	≤18	≥7.2	34(0.2s)	
			4	
-40°C ~ 85°C)				

订货标记示例

HFEVC - T F 200 / 750 - 12 - C N SM -


1 2 3 4 5 6 7 8 9 10

- 1 HFEVC:
- 2 T: H:
- 3 F: Y:
- 4 200: 200A
- 5 DC Blank: 450V 750: 750V
- 6 12: DC12V 24: DC24V PWM: 9V~24V
- 7 C: L:
- 8 Blank: N:
- 9 Blank: SM:
- 10

1)




/Unit mm



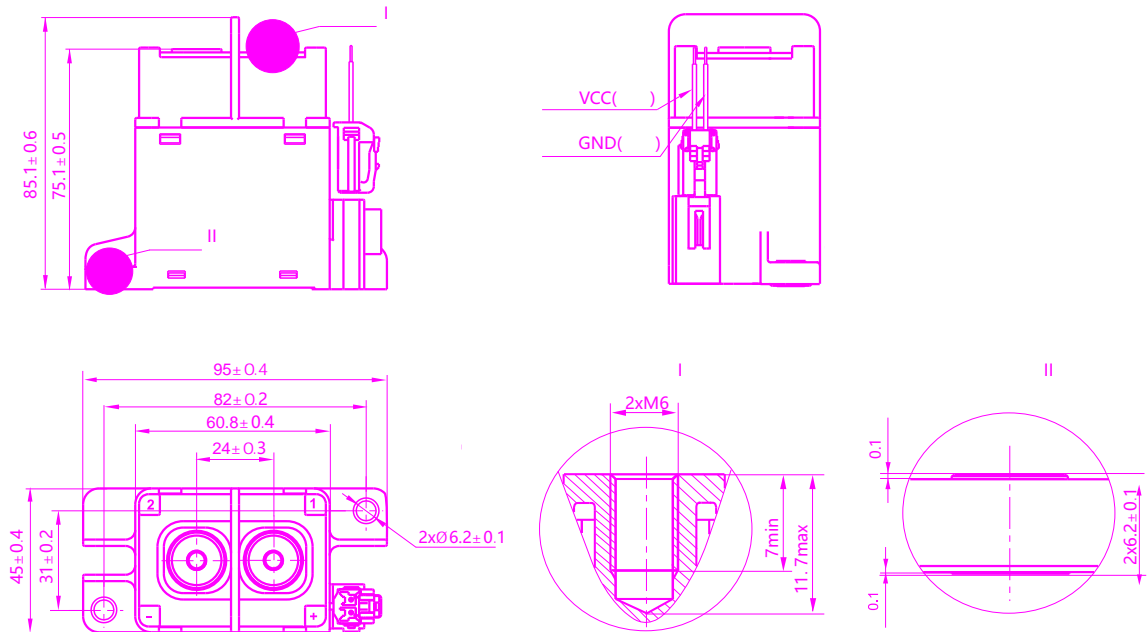




Mounting hole size

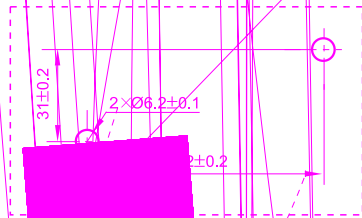

Wiring diagram

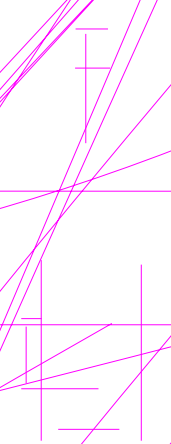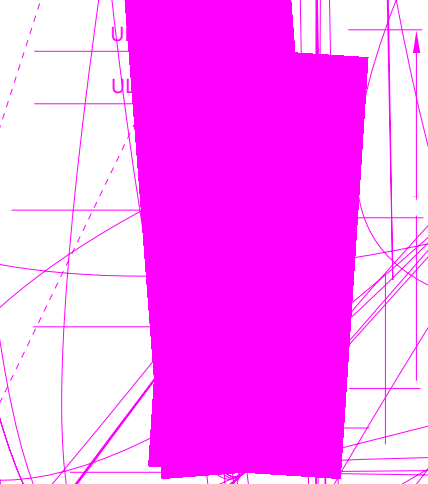



Tolerance curve



S



A

85°C ,

60mm²

